

Multipool N Swimming pool, whirlpool and spa



Centrifugal multistage pump for pool cleaners

Applications

Booster pump for pool cleaners.
Designed to operate with chlorinated and salty water.

Materials

Pump body, diffusers, suction and discharge in technopolymer.
Impellers in AISI 304
Pump shaft in AISI 431.
Mechanical seal in aluminium-graphite.
Motor casing in aluminium.
O-rings in NBR/EPDM.

Equipment

No cable.

Motor

Asynchronous 2 poles.
IPX5 protection.
Class F insulation.
Built-in thermal protection.
Continuous operation.

Limitations


Maximum water temperature: 40° C.



Hydraulic performance table

Model	I [A]	P1 [kW]	P2		C [μF]	l/min	10	20	40	50	70	Code
	1~ 220V	1~	[kW]	[HP]		220v	m³/h	0,6	1,2	2,4	3	
Multipool N	7,4	1,5	0,9	1,2	16	mwc	53	50	44	37	24	206806

Performance curve at 3450 rpm

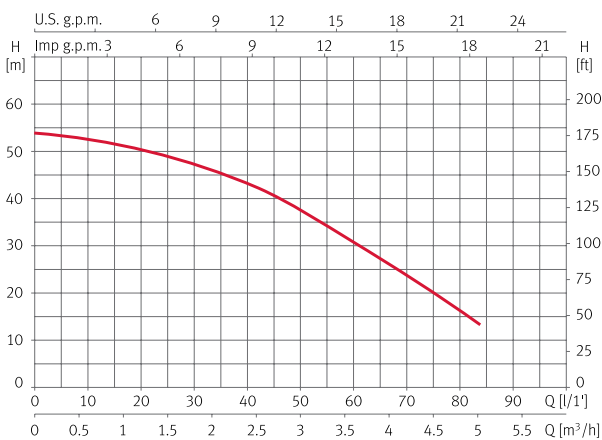

Dimension and weight

Model	A	B	C	D	E	F	G	H	I	Kg
Multipool N	415	190	248	155	198	94	1"	1"	120	11,5

