

Centrifugal single stage pump for water stream

Applications

Generation of a strong water stream to transform swimming pools into a place for sport and leisure.
Self-priming up to 4m.

Materials

Pump body, impeller, diffuser, suction and discharge in technopolymer.
Pump shaft in AISI 431.
Mechanical seal in aluminium-graphite.
Motor casing in aluminium.
O-rings in NBR/EPDM.

Equipment

No cable.
Unions not included.

Motor

Asynchronous 2 poles.
IPX5 protection.
Class F insulation.
Single phase motor with built-in thermal protection.
Continuous operation.

Limitations


Maximum water temperature: 40° C.



Hydraulic performance table


Model	I [A]			P1 [kW]		P2		c [μF] 220v	l/min m³/h	200	400	600	800	1.000	Code	
	1~220V	3~220V	3~440V	1~	3~	[kW]	[HP]			12	24	36	48	60	1~220V	3~220V/440V
Nadorself 300	12,5	-	-	2,7	-	2,2	3	60	mwc	14,4	13,3	12	10	8,2	206812	-
Nadorself 400	-	9,7	5,6	-	3,4	3	4	-		16,4	15,3	13,9	12	10,2	-	206808

Performance curve at 3450 rpm

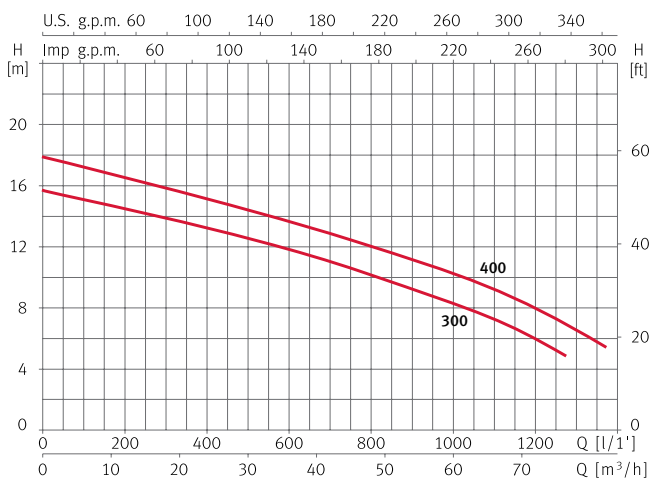


Dimension and weight

Model	A	B	C	D	E	F	G	H	I	Kg
Nadorself 300	416	335	615	130	249	419	70	2 1/2"	47	25
Nadorself 400	416	335	615	130	249	419	70	2 1/2"	47	27

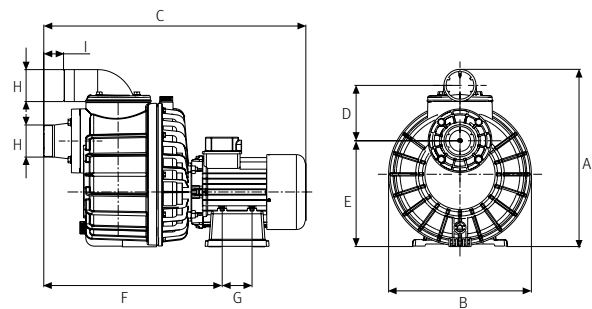

Wiper 3

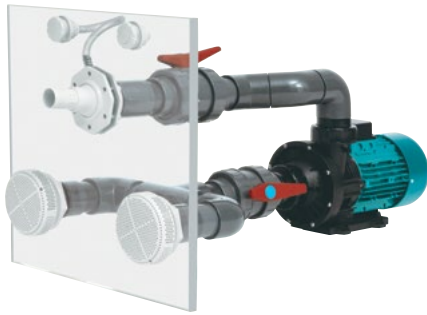

Suction kit	Code
Suction kit for liner pools	130634



Suction kit	Code
Suction kit for concrete pools	130633





Discharge kit	Code
Discharge kit for liner and concrete pools	130632




Hose kit	Code
Hose kit 1,5m	104153


Nadorsel

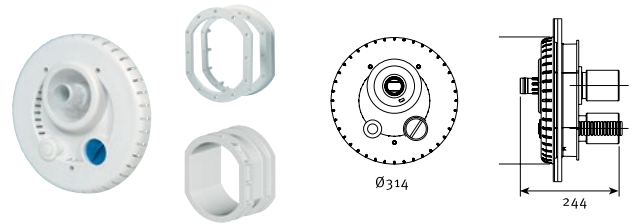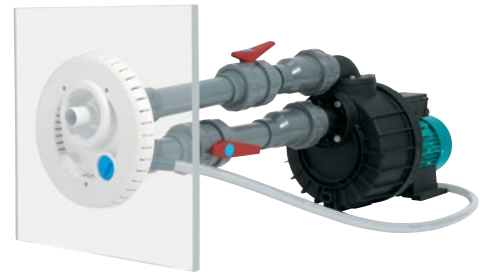

Circular kit	Code
Suction and discharge circular kit	128188
Bushing wall kit for liner and concrete pools	146558

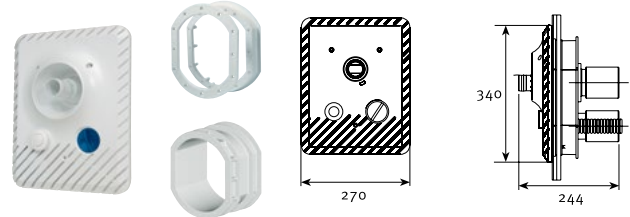

Rectangular kit	Code
Suction and discharge rectangular kit	128189
Bushing wall kit for liner and concrete pools	146558



Control panel	Code
Control panel single phase 220V - 2,2 kW	134548
Control panel three phase 400V - 2,2 kW	134549
Control panel three phase 400V - 3 kW	137584



Suction and discharge union	Code
Suction and discharge union of 75mm	11000596